



The DVB Series of Gas Fireplaces is both economical and offers many great design features. Thanks to an innovative design, the DVB Series provides a beautiful fire for a basic price.

A Beautiful Fire For A Basic Price

DVB Series

300DVB, 400DVB, 500DVB and 600DVB Direct Vent Gas Fireplaces

- Available in 33", 36", 42" and 47"
- Glowing ceramic fiber logs with ember bed and a natural flame aluminized pan burner system
- Shipped standard with black louvers with choice of optional louvers and fronts available to suit any decor
- Optional factory or field installed tavern brown firebrick
- Large glass viewing area up to 795 square inches
- Illustrated consumer-friendly deluxe control panel
- Thermostatically controlled blower available (135 cfm)
- Thermal efficiency up to 80%
- Certified as a vented gas fireplace heater to ANSI Z21.88/CSA 2.33 standard with Btu ratings ranging by model from as low as 15,000 up to 26,000
- Limited lifetime warranty



DVB SERIES



300DVB

Shown with optional gold arched front, gold door frame and black fire screen doors



400DVB

Shown with optional black arched front, black door frame and gold fire screen doors



500DVB

Shown with optional brushed pewter arched front, brushed pewter door frame and black fire screen doors



600DVB

Shown with optional gold arched front, black door frame and gold fire screen doors

FEATURES:

- Large viewing area for a beautiful view of the fire

300DVB: 486 square inches	400DVB: 591 square inches
500DVB: 672 square inches	600DVB: 795 square inches
- Slim line depth

300DVB: 14"	400DVB: 16"
500DVB: 16"	600DVB: 16"
- BTU Ratings (Natural and LP gas)

300DVB: 15,000 - 21,000 BTU	400DVB: 17,000 - 24,000 BTU
500DVB: 20,000 - 26,000 BTU	600DVB: 20,000 - 26,000 BTU
- Variable Hi-Lo flame adjustment
- Standard as rear vent and field convertible to top vent
- Flexible connector with On/Off valve included
- Installs with Simpson Dura Vent 4" x 6-5/8" vent pipe
- Field convertible to natural or propane gas



DELUXE CONTROL PANEL

OPTIONAL ACCESSORIES

FACTORY INSTALLED OPTIONS

- Tavern Brown Firebrick
- Polished Brass Louvers
- Variable Thermostat Controlled Forced Air Blower

FIELD INSTALLED ACCESSORIES

- Decorative black mesh glass cover



Brass Louvers

Pewter Louvers



Curved Brass Trim

Curved Pewter Trim



Curved Black Trim



Variable Thermostat Controlled Forced Air Blower (135 cfm)



Tavern Brown Firebrick

WOOD SURROUNDS AND HEARTHES

- Wood surrounds and hearths available in corner or flat wall in finishes shown below



Birch Corner Surround and Hearth in Dark Cherry Finish with Curved Brass Trim



Dark Cherry Finish

Honey Oak Finish



Oak Unfinished - Paint/Stain Ready

Birch Unfinished - Paint/Stain Ready

REMOTE CONTROLS AND WALL THERMOSTATS



On/Off Remote Control with Receiver.



On/Off Remote Control with LCD Display and Receiver.



On/Off Thermostat Remote Control with LCD Display and Receiver.



On/Off Thermostat Remote Control with 3-Speed Blower Control, LCD Display and Receiver.



Programmable Thermostat Remote Control with Receiver.



Touch Light™ Table Top TLM On/Off and TLT Thermostat Remote Control with Receiver.



Programmable Wireless Wall Thermostat



Oak Wall Surround and Hearth in Honey Oak Finish with Curved Black Trim


DECORATIVE FRONTS, PANELS, FRAMES AND FIRE SCREEN DOORS



Black Arched Front



Brushed pewter Filigree Panels, Black Door Frame and Brushed pewter Fire Screen Doors

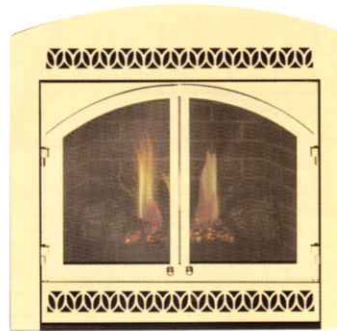

Gold Arched Front, Gold Door Frame and Gold Fire Screen Doors



Brushed pewter Arched Front, Black Door Frame and Black Fire Screen Doors

SPECIFICATIONS

Product Specifications

Model	Width		Height		Depth		BTU/H NAT and LP	Viewing Area (sq. in.)	Circulating	Design Certified
	Actual	Framing	Actual	Framing	Actual	Framing				
300DVB	33 1/16"	33 1/2"	37"	37 1/4"	14"	*13 3/4"	15,000-21,000	486	Standard	CSA
400DVB	37 1/16"	37 1/2"	40 1/2"	40 7/8"	16"	*15 3/4"	17,000-24,000	591	Standard	CSA
500DVB	41 1/16"	41 1/2"	40 1/2"	40 7/8"	16"	*15 3/4"	20,000-26,000	672	Standard	CSA
600DVB	47 1/16"	47 1/2"	40 1/2"	40 7/8"	16"	*15 3/4"	20,000-26,000	795	Standard	CSA

Hardwood Surround Dimensions


* Framing dimension allows for drywall thickness.

	30" Wall Surround	30" Wall Hearth	32" Wall Surround	32" Wall Hearth	36" Wall Surround	36" Wall Hearth
Width of mantel	46-1/8"	52-1/2"	50-1/2"	58"	54-3/8"	61-1/4"
Height w/o hearth	45-1/2"	4-1/4"	48"	5"	48-1/4"	5"
Depth	17-3/4"	21-1/8"	17-1/4"	21-3/8"	21-3/4"	25-1/2"
Opening width	33-5/8"	-	38"	-	42"	-
Opening height	32-3/8"	-	35-7/8"	-	35-3/4"	-
Width of mantel top	52-1/2"	-	58"	-	62"	-
Depth of mantel top	21-1/8"	-	21-1/8"	-	25-1/2"	-

	30" Corner Surround	30" Corner Hearth	32" Corner Surround	32" Corner Hearth	36" Corner Surround	36" Corner Hearth
Width of mantel	57-3/4"	57-3/4"	62-3/8"	62-3/8"	63-3/8"	63-3/8"
Height w/o hearth	45-1/4"	4-1/4"	48-1/4"	5"	48-1/4"	5"
Distance from corner to front center of mantel	33"	-	35-1/2"	-	37-1/2"	-
Distance from corner to front edge along wall	40-3/4"	-	44-1/8"	-	47"	-
Opening width	33-5/8"	-	38"	-	42"	-
Opening height	32-3/8"	-	35-7/8"	-	35-7/8"	-



400DVB Direct Vent
Gas Fireplace

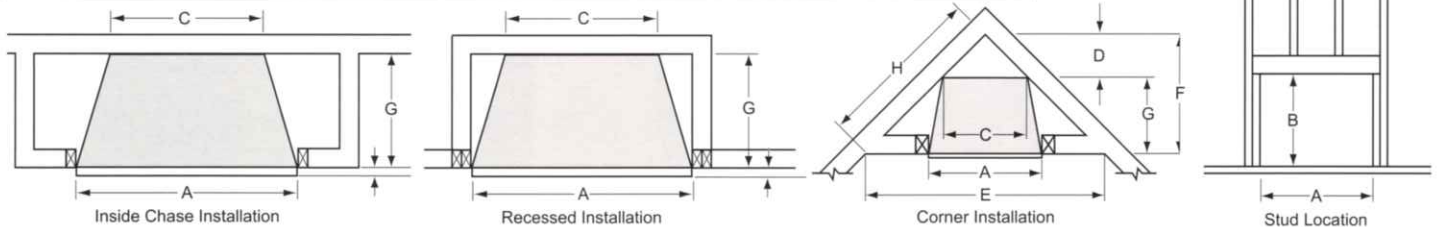

Direct Vent Fireplace Framing Dimensions

	300DVB	400DVB	500DVB	600DVB
A	33 1/2"	37 1/2"	41 1/2"	47 1/2"
B	37 1/4"	40 7/8"	40 7/8"	40 7/8"
C	28 1/4"	29 1/4"	33 1/4"	39 1/4"
D	14 1/8"	14 5/8"	16 5/8"	19 5/8"
E	55 11/16"	60 7/8"	64 7/8"	70 7/8"
F	27 13/16"	30 7/16"	32 7/16"	35 7/16"
G	13 3/4"	15 3/4"	15 3/4"	15 3/4"
H	39 3/8"	43 1/16"	45 7/8"	50 1/8"

SOLD BY: _____

REGULATORY APPROVAL

The DVB series is approved to ANSI Z21.88 and approved for installation in bedrooms and aftermarket manufactured (mobile) home, where not prohibited by state or local codes.

Warning:

- Correct installation of the ceramic fiber logs and periodic cleaning are necessary to avoid potential service problems.
- Keep small children and animals away from the hot surfaces at all times.
- This appliance must not be connected to a chimney flue servicing a separate solid-fuel burning appliance.
- Common venting of this appliance with other gas appliances is not allowed.



A Division of MHS, Inc.
149 Cleveland Drive • Paris, KY 40361
www.martinhearthandheating.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.



MHH-DVB Series

DIRECTVENT Fireplace



What a beautiful way to enjoy a roaring fire! The Peninsula offers a three-sided view and unique design possibilities.

What A Beautiful Way To Enjoy A Roaring Fire!

PFDVD Peninsula Fireplace

Features:

- Contemporary peninsula design offers a three-sided viewing area for a dramatic way to divide a room
- Full size 36" hearth opening and extra large viewing area
- Patented natural flame aluminized burner featuring artistically crafted ceramic fiber logs with an extra large emberbed with radiant heat producing glowing embers
- Standard features include black louvers, tavern brown firebrick, tempered glass, 30" flexible hose with on/off valve, junction box and 15ft. of wire for wall switch
- Optional honey oak or cherry mantel tops, side panels and hearths
- Smartline field-installed accessories include brass louvers, pewter louvers and a variable speed thermostat blower
- Heat output up to 36,000 Btu
- Millivolt with on/off switch and variable flame height control or electronic ignition in natural gas or propane is standard
- Patent Pending field convertible vent technology to vent horizontally or vertically
- Full size builder style zero clearance
- Easily removable doors
- Thermal efficiency up to 80%
- Limited lifetime warranty
- CSA design certified





View the fire from each side of this unique and beautiful fireplace. It's perfect for use as a room divider.



*STDVD See-Thru Direct Vent Fireplace shown above with optional brass louvers.
STDVD See-Thru Direct Vent Fireplace shown beside with optional brushed pewter arched front, brushed pewter door frame and brushed pewter firescreen doors.*

When Your Home Demands A Dramatic Fire

STDVD See-Thru Fireplace

Features:

- Two fireplaces in one
- Full size 36" hearth opening and extra large viewing area
- Patented natural flame aluminized burner featuring artistically crafted ceramic fiber logs with an extra large emberbed with radiant heat producing glowing embers
- Standard features include black louvers, tavern brown firebrick, tempered glass, 30" flexible hose with on/off valve, junction box and 15ft. of wire for wall switch
- Millivolt with on/off switch and variable flame height control or electronic ignition in natural gas or propane is standard
- Smartline field-installed accessories include brass and pewter louvers; decorative arched fronts, frames and firescreen doors in gold, brushed pewter and black; and a variable speed thermostat blower
- Heat output up to 36,000 Btu
- Patent Pending field convertible vent technology to vent horizontally or vertically
- Full size builder style zero clearance
- Easily removable doors
- Thermal efficiency up to 80%
- Limited lifetime warranty
- CSA design certified



A great way to make a corner or room divider more interesting. Martin's End Open Fireplaces extend your view of the fire.

Enjoy The View Without The Price

CRDVD and CLDVD Corner Fireplaces

Features:

- Stylish modern appearance enhances the look of any room; providing several options for adding a fireplace to a room with limited wall space
- Right and left corners offer maximum versatility
- Full size 36" hearth opening and extra large viewing area
- Patented natural flame aluminized burner featuring artistically crafted ceramic fiber logs with an extra large emberbed with radiant heat producing glowing embers
- Standard features include black louvers, tavern brown firebrick, tempered glass, 30" flexible hose with on/off valve, junction box and 15ft. of wire for wall switch
- Smartline field-installed accessories include brass louvers, pewter louvers and a variable speed thermostat blower
- Heat output up to 36,000 Btu
- Millivolt with on/off switch and variable flame height control or electronic ignition in natural gas or propane is standard
- Patent Pending field convertible vent technology to vent horizontally or vertically
- Full size builder style zero clearance
- Easily removable doors
- Thermal efficiency up to 80%
- Limited lifetime warranty
- CSA design certified

SPECIFICATIONS AND FRAMING

Product Specifications

Model	Width		Height		Depth		BTU/H (x1000)		FE* Rated		Circulating	Design Certified
	Actual	Framing	Actual	Framing	Actual	Framing	NAT	LP	NAT	LP		
STDVD	44"	44-1/4"	40-15/16"	41-1/8"	23-3/4"	22-3/4"	25-36	26-36	62.8%	70.6%	Circulating	CSA
PFDVD	44"	43-1/2"	40-15/16"	41-1/8"	23-3/4"	22-3/4"	25-36	26-36	62.8%	70.6%	Circulating	CSA
C(R)/(L)DVD	44"	43-1/2"	40-15/16"	41-1/8"	24-1/2"	24"	25-36	26-36	62.8%	70.6%	Circulating	CSA

OPTIONAL ACCESSORIES

Field Installed Accessories



Brass Louvers



Pewter Louvers



Variable Forced Air Blower (135 cfm)

- Decorative arched fronts, frames and firescreen doors available in gold, brushed pewter and black (STDVD Only)

For Remote Control Models



On/Off Remote Control with Receiver.



On/Off Remote Control with LCD Display and Receiver.



On/Off Thermostat Remote Control with LCD Display and Receiver.



Programmable Thermostat Remote Control with LCD Display and Receiver.



On/Off Thermostat Remote Control with 3-Speed Blower Control, LCD Display and Receiver.



Touch Light™ Table Top/Wall Mount TLM On/Off and TLT Thermostat Remote Control with LCD Display and Receiver.



7-Day Programmable On/Off Wireless Wall Thermostat, Battery or 110 Receiver.

Warning:

- It is recommended that the screen be used during operation of this log set. Always ensure the screen has adequate spaces to allow for passage of combustion air to the gas log set.
- Correct installation of the ceramic fiber logs, proper location of the heater and periodic cleaning are necessary to avoid potential service problems with sooting.
- Keep small children and animals away from the open flame of the gas log set at all times.
- There may be a start-up odor associated with the heating of the logs. The odor should diminish in 2-3 hours of operation with the burner at its highest setting with the fan in the off position.



A Division of MHS, Inc.
149 Cleveland Drive • Paris, KY 40361
www.martinhearthandheating.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.



MADE IN U.S.A.
Rev. 07-05




SPECIFICATIONS AND FRAMING

Designer Direct Vent Fireplace Framing Dimensions

	STDVD		PFDVD		C(R)/(L)DVD	
	1/2" Drywall	5/8" Drywall	1/2" Drywall	5/8" Drywall	1/2" Drywall	5/8" Drywall
A ₁	44-1/4"	44-1/4"	43-1/2"	43-3/8"	43-1/2"	43-3/8"
A ₂	40-5/8"	40-5/8"	39-7/8"	39-3/4"	39-7/8"	39-3/4"
B	41-1/8"	41-1/8"	41-1/8"	41-1/8"	41-1/8"	41-1/8"
C	22-3/4"	22-1/2"	22-3/4"	22-1/2"	24"	23-7/8"

Please refer to the installation manual for more detailed framing instructions.

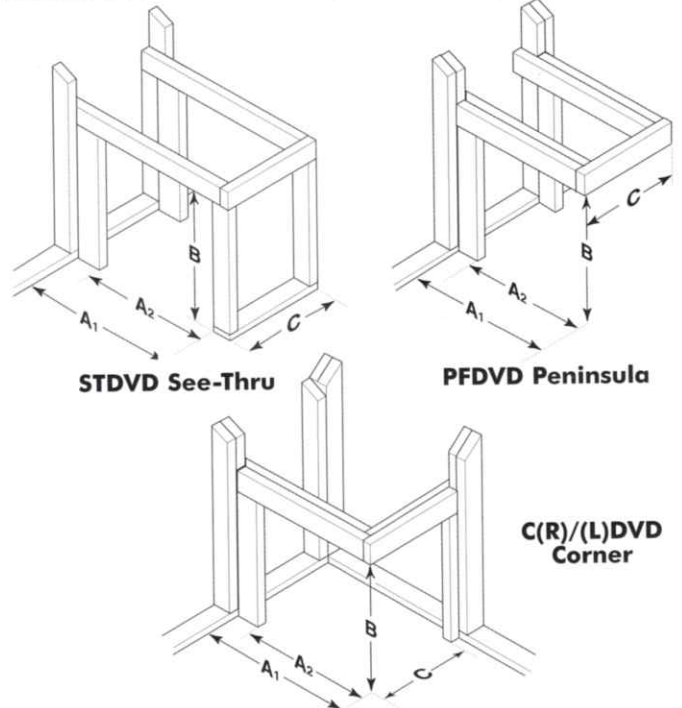

REGULATORY APPROVAL

The DV Designer series is approved to ANSI Z21.88 and approved for installation in also approved for installation in an aftermarket manufactured (mobile) home, where not prohibited by state or local codes. Consult local building codes prior to installation.

*Tested to Canadian Standards Association's CSAP.4.1-02 Testing Method for Measuring Fireplace Efficiency.

SOLD BY:

MHH-DVDesigner